

# LUCID 20 IP65

A surface mounted circular 8 inch IP65 Rated downlight offering a high lumen output with a 120 degree beam angle.



Silver Bezel



5 Year Warranty



## Specification.

- 18 watt
- 980 lumens
- 120 degree beam angle
- L70 Rating - 50,000 hours
- P.F 0.95
- IES/LDT Files Available

## Applications.


- Office, School, Retail, NHS, Home

## Dimensions.

- 210mm x 25mm
- 0.9 KGS

## Options.

- Dimmable: Dali/1-10v/mains
- Emergency: Integral emergency pack or Allied 1w emergency button cell
- Fixings: Mounted
- 3000-3500k, 4000k-4500k, 6000k-6500k

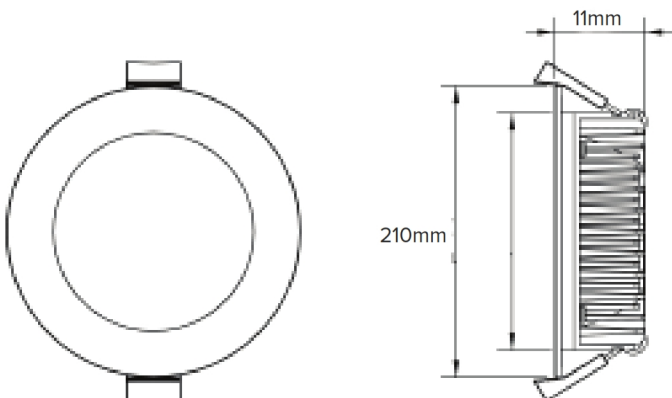

Carbon Trust Accredited Suppliers have undergone an independent accreditation process to demonstrate their skills and experience in delivering low energy, high performance solutions.

### Customise your product: AL-LCDIP20...

WW	3000-3500k
NW	4000-4500k
PW	6000-6500k
WT	White Trim
ST	Silver Trim
DIM	Main Dimmable
DALI	Dali Dimmable
1-10v	1-10v Dimmable