

LUCID 20 IP65

CHARACTERISTIC

Wattage:	18W
Colour temperature:	3000K, - 6000K
P.F:	0.92
Option:	Dimmable: 230v/dali/1-10v Emergency: Integral emergency pack or Allied 1w emergency button cell Fixings: recessed (spring clips)




SPECIFICATION

A surface mounted circular 8 inch IP65 Rated downlight offering a high lumen output with a 120 degree beam angle.

APPLICATION

Office, School, Retail, NHS, Home

DIMENSIONS

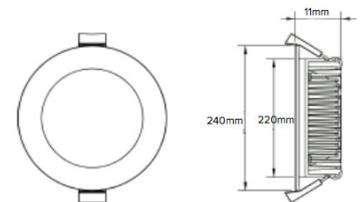

AVAILABLE OPTIONS

Wattage	Lumens	Colour Temperature	Body	Beam Angle	Dimensions
18W	980lm	3000K-6000K	White/Silver	60	210mm x 25mm

** Initial, tolerance +/- 10%