

# LUCID 60 PANEL

## CHARACTERISTIC

Wattage:	39W
Colour temperature:	3000K - 6500K
P.F:	0.95
Option:	Dimmable: Dali/1-10v/Mains Emergency: Integral Emergency pack or Allied 1w emergency button cell Fixings: Recessed, Mounted, Suspended




## SPECIFICATION

A high power 595mm x 595mm square panel with higher lumen output that can be surface mounted, recessed or suspended.

## APPLICATION

Widely used in hotels, meeting rooms, offices, hospitals, schools, factories, commercial lighting, shopping malls, and supermarkets

## DIMENSIONS

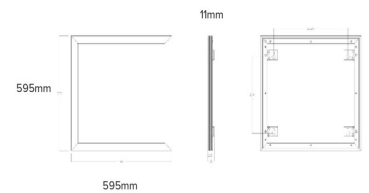

## AVAILABLE OPTIONS

Wattage	Lumens	Colour Temperature	Beam Angle	Dimensions
39W	3200lm	3000K-6500K	120	595mm x 595mm x 11mm

\*\* Initial, tolerance +/- 10%