Allied Pro Spot 10l

SPECIFICATION

Wattage:	6W/9W/11W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP65 Fire Rated
Impact protection IK:	IK00
Colour temperature:	4000K
Driver:	Integral
Chip:	Branded
Power factor:	>0.9
Lifetime @ L70:	35 000hrs
Diffuser:	Acrylic
Weight:	420g

DESCRIPTION

The Allied Pro Spot 10l is a premium LED downlight that offers the efficiency of LED, the safety of IP65 and fire rating certification and the flexibility of an adjusting, tiltable design.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Recessed

Body: Iron
Colour: White

Available on request;
Dimming: DALI
Emergency: 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W Cutout (mm)
6	450	4000	>80	75	55º	64 x 100 x 92
9	750	4000	>80	83	55º	64 x 100 x 92
11	890	4000	>80	81	55º	64 x 100 x 92

TECHNICAL DRAWINGS

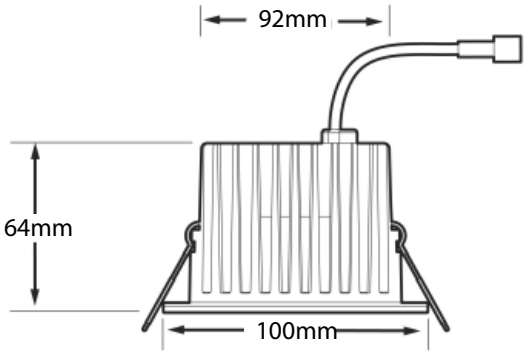

Unit 462 I Ranglet Road I Walton Summit Centre I Bamber Bridge I Preston I PR5 8AR I Tel: 01772 883876 I Fax: 01772 698682
Bermondsey Island I 2 Long Walk I London I SE1 3NQ I Tel: 02077402764
Email: info@allied.co.uk I Website: www.allied.co.uk

E&OE
Rev 1 - 21/02/17

Registered in England 05762369 VAT Reg No. 984 2824 83