


SPECIFICATION

Wattage:	30W/52W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP20
Impact protection IK:	IK00
Colour temperature:	3000K/4000K
Driver:	Osram
Chip:	CREE
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Weight:	2300g

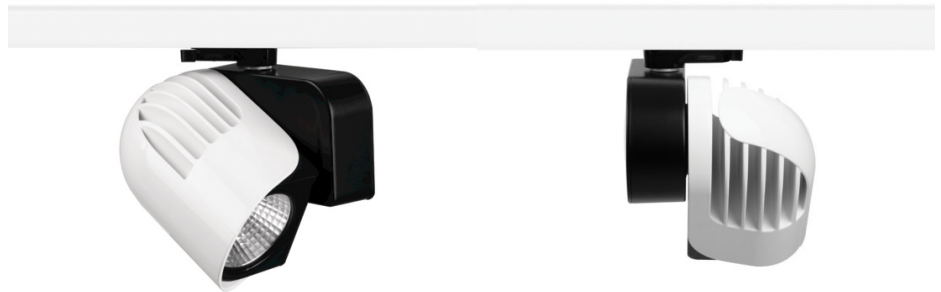


DESCRIPTION

The Allied Kayn L is a high efficacy track lighting luminaire with an extremely good passive cooling system but also with a modern design. The tiltable optics allow for directing the light in an optimal way, making this light perfect for retail lighting. The Allied Kayn L comes in three various of colour, Black and White, White, Black.

IES/LDT files available on request.

PHOTOMETRIC

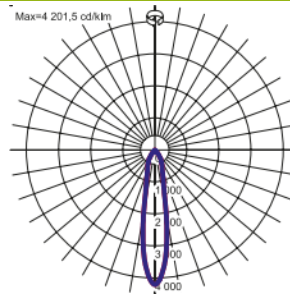

FURTHER INFORMATION

Mounting: In 3-phase track

Body: Die-cast Aluminium
Colour: Back and White, White, Black

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
30	2900	3000	≥80	97	22°/32°/42°	206 x 159 x 146
30	3000	4000	≥80	100	22°/32°/42°	206 x 159 x 146
52	4000	3000	≥80	77	22°/32°/42°	206 x 159 x 146
52	4300	4000	≥80	83	22°/32°/42°	206 x 159 x 146

TECHNICAL DRAWINGS

