


SPECIFICATION

Wattage:	20W
Supply voltage:	180-240V 50/60Hz
Ingress protection IP:	IP40
Impact protection IK:	IK04
Colour temperature:	4000K/5000K
Driver:	LiFud
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Acrylic
Weight:	1020g

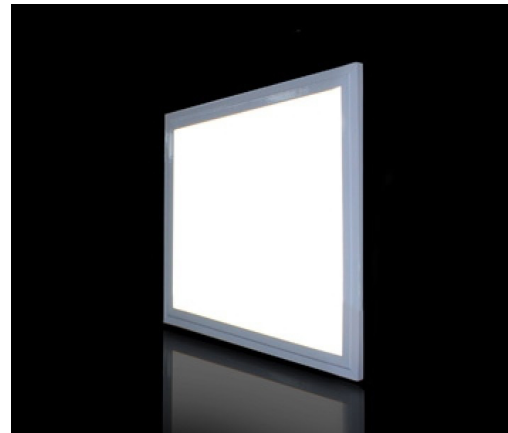


DESCRIPTION

The Allied Lucid 30 LU is a 12 inch square panel with high lumen output that can be surface mounted, recessed or suspended.

IES/LDT files available on request.

PHOTOMETRIC

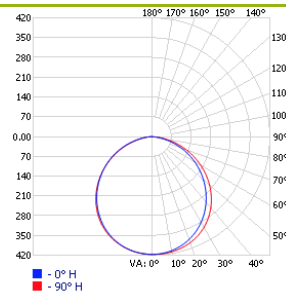

FURTHER INFORMATION

Mounting: Surface, Recessed, Suspended

Body: Aluminium
Colour: White

Available on request:
Dimming: DALI
Emergency: 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W (mm)
20	1800	4000	>80	90	120°	300 x 300 x 9
20	1900	5000	>80	95	120°	300 x 300 x 9

TECHNICAL DRAWINGS

