

### SPECIFICATION

Wattage:	25W/ 36W
Supply voltage:	22-240V 50/60Hz
Ingress protection IP:	IP40
Impact protection IK:	IK04
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Microprismatic




### DESCRIPTION

The Allied Lucid LOW UGR s a recessed LED panel with a slim-line construction and microprismatic diffuser for glare-free light distribution 19 (UGR<19). LG05:Lighting for education and LG07:Lighting for offices compliant.

IES/LDT files available on request.

### PHOTOMETRIC

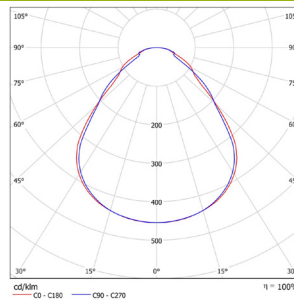

### FURTHER INFORMATION

Mounting: Recessed, Surface


Body: Aluminium  
Colour: White

Available on request:  
Dimming: DALI, Switch control  
Emergency: 3hrs, DALI, Self-test

### AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
18	1800	4000	>80	100	120°	596 x 295 x 11
25	2550	4000	>80	102	120°	596 x 596 x 11
36	3750	4000	>80	104	120°	596 x 596 x 11
36	3680	4000	>80	102	120°	295 x 1195 x 11

### TECHNICAL DRAWINGS

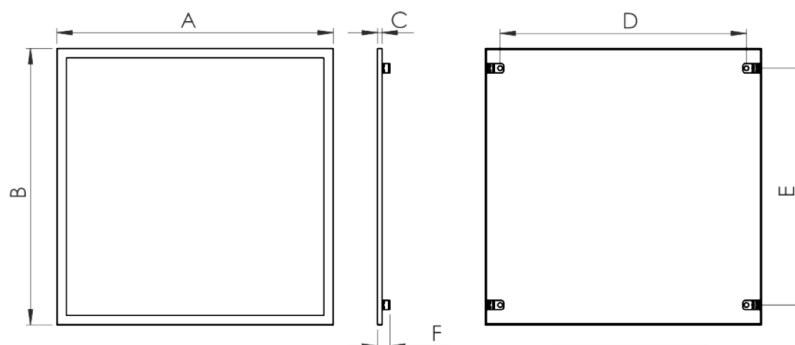

A, mm	B, mm	C, mm	D, mm	E, mm	F*, mm
596	596	11	530	510	40
295	1195		230	635	40

\*Height with hanging part