

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP65
Impact protection IK:	IK05
Colour temperature:	3000K/4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L80B50:	50 000hrs
Diffuser:	Opal acrylic, UV stable, chemically resistant
Weight:	4500g/6000g/9000g




DESCRIPTION

The Allied Lucid Recessed IP65 rated luminaire delivers a uniform light across the whole of its surface. Its high level of efficacy (>99lm/W) offers savings in running cost against traditional 72W fluorescent fitting as well as many other LED panels. Operating temperature range, °C -10...+35 (0...+35°C emergency version)

IES/LDT files available on request.

PHOTOMETRIC

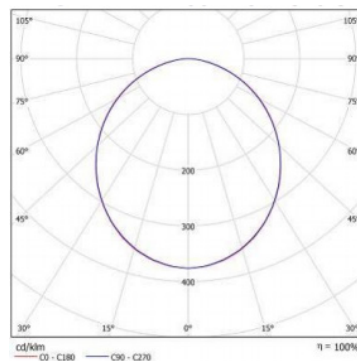

FURTHER INFORMATION

Mounting: Recessed
Body: Steel
Colour: White

Available on request;
Dimming: DALI, Switch
Emergency: 3hrs, DALI, Self-test
Diffuser: Opal, Clear

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
29.5	3202	4000	>80	108	120°	595 x 595 x 85
39.4	4270	4000	>80	108	120°	595 x 595 x 85
43.7	4343	4000	>80	99	120°	595 x 595 x 85
58.3	5791	4000	>80	99	120°	595 x 595 x 85
41.6	4507	4000	>80	108	120°	1195 x 295 x 85
61.6	6112	4000	>80	99	120°	1195 x 295 x 85
83.1	9014	4000	>80	108	120°	1195 x 295 x 85
62.4	6761	4000	>80	99	120°	1195 x 595 x 85
83.1	9014	4000	>80	108	120°	1195 x 595 x 85
92.4	9168	4000	>80	99	120°	1195 x 595 x 85
123.1	12225	4000	>80	99	120°	1195 x 595 x 85
52.5	5693	4000	>80	108	120°	1495 x 295 x 85
77.8	7721	4000	>80	99	120°	1495 x 295 x 85
105.0	11386	4000	>80	108	120°	1495 x 295 x 85