

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP44
Impact protection IK:	IK02
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L80B50:	40 000hrs
Diffuser:	PMMA




DESCRIPTION

Allied Angel N Wall ceiling and surface mounted LED luminaire with opal IP44 diffuser and rounded profile, designed to be fixed onto ceiling or walls of any type, including flammable surfaces.

IES/LDT files available on request.

PHOTOMETRIC

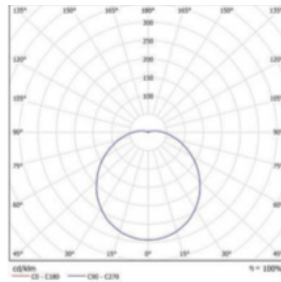

FURTHER INFORMATION

Mounting: Surface

Body: Steel
Colour: White


Available on request:

Dimming: 1-10V, DALI, Radio Wave Transmitter
Emergency: 3hrs, DALI, Self-test*
Sensor: Microwave, Corridor Function
*12W & 18W Versions do not support DALI or Self-test emergency options.

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions Dia H(mm)
12.0	1080	4000	>80	90	120°	ø280 x 90
18.0	1700	4000	>80	94	120°	ø360 x 105
22.0	2200	4000	>80	100	120°	ø410 x 115
32.0	3200	4000	>80	100	120°	ø410 x 115
40.0	4164	4000	>80	104	120°	ø500 x 140

TECHNICAL DRAWINGS

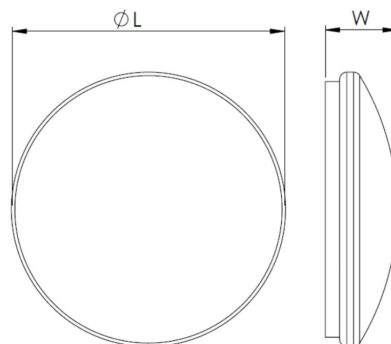

L, mm	W, mm	A, mm	B, mm	C, mm
280	95	135	87	77.5
360	105	196	104	123
410	115	239	157	149.5
500	140	317	191.5	124.5