Allied Compact Highbay O

SPECIFICATION

Wattage:	115W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP65
Impact protection IK:	IK08
Colour temperature:	4000K
Driver:	Osram
Chip:	Osram
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Polycarbonate

DESCRIPTION

Compact High Bay, LED high bay luminaire, primary light control with lens, primary optical cover: cover panel, of PC, transparent, light emission: direct distribution, primary light characteristic: rotationally symmetric.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: suspended, Surface

Body: Diecast Aluminium, Powder coated
Colour: Metallic Grey

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions Dia H(mm)
115	15000	4000K	>80	130	60º/90º	ø299 x 138

TECHNICAL DRAWINGS

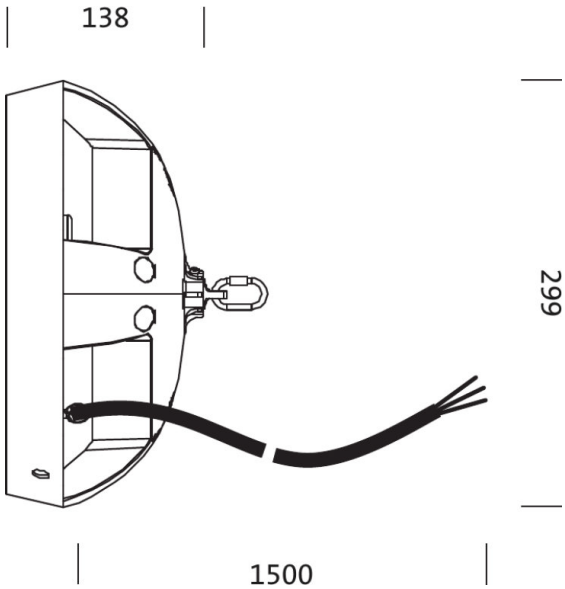

G11/G12 | Old Docks House | 90 Watery Lane | Preston | Lancashire | PR2 1AU | Tel: 01772 883876
Bermondsey Island | 2 Long Walk | London | SE1 3NQ | Tel: 02077402764
Email: info@allied.co.uk | Website: www.allied.co.uk

E&OE
Rev 1 - **08/03/19**

Registered in England 05762369 VAT Reg No. 984 2824 83