Allied Ocean L

SPECIFICATION

Wattage:	32W/ 45W/ 51W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP66
Impact protection IK:	IK06
Colour temperature:	3000K/ 4000K
Driver:	Osram
Chip:	CREE
Power factor:	>0.95
Lifetime @ L80:	100 000hrs
Diffuser:	Polycarbonate

DESCRIPTION

The Allied Ocean L is a hermetic LED Luminaire that is water-jet proof which is intended for mounting inside industrial and architectural applications.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Surface, Suspended

Body: Plastic
Colour: Red, White, Grey

Available on request;
Dimming: DALI
Emergency: 3hrs, Central battery
Diffuser/Optics: Opal, 22°, 60°, 30°, Low UGR, Transparent.

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
32	4600	4000	≥80	144	22°/ 30°/ 60°	1245 x 100 x 90
45	6400	4000	≥80	142	22°/ 30°/ 60°	1245 x 100 x 90
51	7050	4000	≥80	138	22°/ 30°/ 60°	1245 x 100 x 90

TECHNICAL DRAWINGS

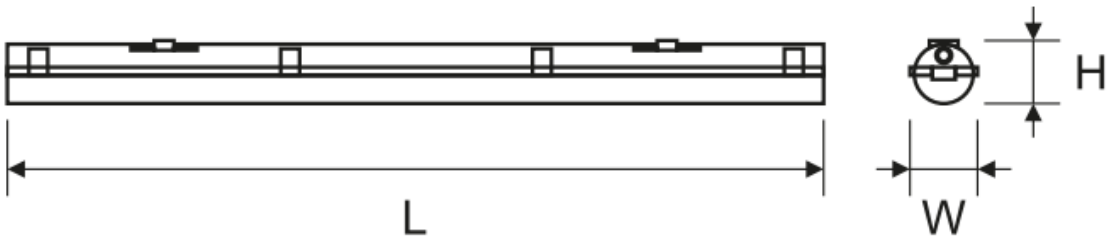

G11/G12 | Old Docks House | 90 Watery Lane | Preston | Lancashire | PR2 1AU | Tel: 01772 883876
Bermondsey Island | 2 Long Walk | London | SE1 3NQ | Tel: 02077402764
Email: info@allied.co.uk | Website: www.allied.co.uk

Registered in England 05762369 VAT Reg No. 984 2824 83

E&OE
Rev 1 - **08/03/19**