

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP66
Impact protection IK:	IK08
Colour temperature:	4000K/5700K
Driver:	Osram
Chip:	CREE
Power factor:	>0.95
Lifetime @ L80B10:	80 000hrs
Diffuser:	Glass
Weight:	2900g




DESCRIPTION

Modern design LED Streetlight, offered in a number of different wattages with different dimming options and can adapted to both side and bottom mounting.

Lateral surface wind exposed.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounted: Bracket

Body: High pressure die-cast Aluminum
Colour: Gray/Graphite

Available on request:

Dimming: DALI, 1-10V Dim, LLOC, Twilight Sensor.

***Type of Optic**

O9 - Bike Paths
O10 - Pedestrian Zones


AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H D(mm)
14	1800	4000	>70	129	Optic Type*	407 x 110 x 120 x 490
20	2450	4000	>70	122	Optic Type*	407 x 110 x 120 x 490
27	3250	4000	>70	120	Optic Type*	407 x 110 x 120 x 490
36	3900	4000	>70	105	Optic Type*	407 x 110 x 120 x 490
41	4400	4000	>70	107	Optic Type*	407 x 110 x 120 x 490

TECHNICAL DRAWINGS



Reducers 60/76mm

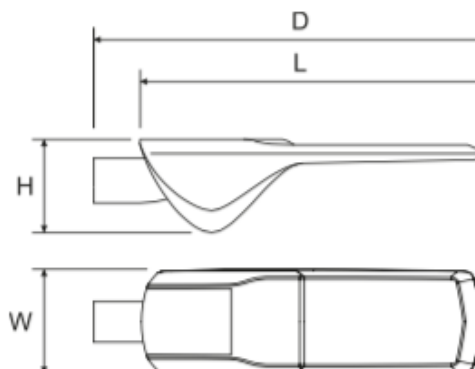

Wall bracket ø60mm