Allied Lucid 50 NL

SPECIFICATION

Wattage:	20W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP20
Impact protection IK:	IK04
Colour temperature:	3000K/ 4000K/ 6000K
Driver:	Philips
Chip:	SMD2825
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Polycarbonate

DESCRIPTION

The Allied Lucid 50 NL Panels come with a flicker free driver and have a white finish.

IES/LDT files available on request.

PHOTOMETRIC

FURTHER INFORMATION

Mounting: Recessed, Surface

Body: Aluminium
Colour: White

Available on request;
Dimming: DALI, 1-10V, Mains
Emergency: 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
20	2800	4000	>80	140	120°	495 x 495 x 10

TECHNICAL DRAWINGS

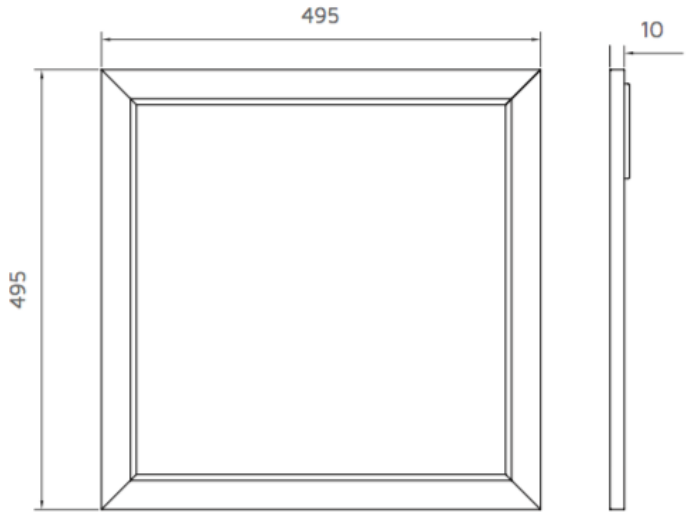

Unit 462 I Ranglet Road I Walton Summit Centre I Bamber Bridge I Preston I PR5 8AR I Tel: 01772 883876 I Fax: 01772 698682
Bermondsey Island I 2 Long Walk I London I SE1 3NQ I Tel: 02077402764
Email: info@allied.co.uk I Website: www.allied.co.uk

Registered in England 05762369 VAT Reg No. 984 2824 83