

SPECIFICATION

Wattage:	Various
Supply voltage:	220-2240V 50/60Hz
Ingress protection IP:	IP65
Impact protection IK:	IK10+
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L80B50:	100 000hrs
Diffuser:	Opal polycarbonate, 4mm, UV stabilized, vandal resistant




DESCRIPTION

A surface corner-mounted IP65 LED luminaire designed to withstand extreme vandalism in public areas.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Surface


Body: Zinc-plated sheet steel
Colour: White

Available on request;
Dimming: Switch Dimming, DALI, Corridor Function
Emergency: DALI, 3hrs
Sensor: Microwave

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
11.1	1144	4000	>80	103	120°	380 x 135 x 135
14.5	1681	4000	>80	116	120°	660 x 135 x 135
26.0	2845	4000	>80	110	120°	660 x 135 x 135
21.7	2521	4000	>80	116	120°	940 x 135 x 135
38.9	4267	4000	>80	110	120°	940 x 135 x 135
27.3	3362	4000	>80	123	120°	1220 x 135 x 135
38.9	4575	4000	>80	117	120°	1220 x 135 x 135
50.8	5690	4000	>80	112	120°	1220 x 135 x 135
33.7	4202	4000	>80	125	120°	1500 x 135 x 135
48.7	5719	4000	>80	117	120°	1500 x 135 x 135
63.5	7112	4000	>80	112	120°	1500 x 135 x 135

TECHNICAL DRAWINGS

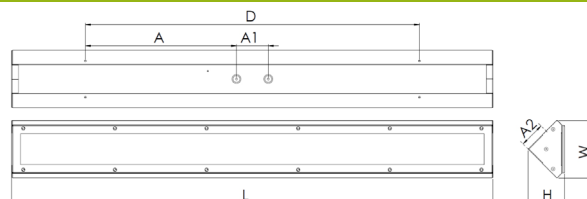

L, mm	W, mm	H, mm	D, mm	A, mm	A ₁ , mm	A ₂ , mm
380	135	135	300	100	100	80
660			450	175		
940			600	250		
1220			900	400		
1500			1050	525		