

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP44
Impact protection IK:	IK04
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L80B50:	75 000hrs
Diffuser:	Opal




DESCRIPTION

A surface LED downlight with deepened opal diffuser and cylindrical shape .

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Surface


Body: Aluminium
Colour: White

Available on request;
Dimming: DALI, Switch Dimming
Emergency: 3hrs
RAL Colours

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions D H(mm)
11.8	1321	4000	>80	112	90°	ø200 x 130
16.0	1858	4000	>80	116	90°	ø200 x 130
23.1	2575	4000	>80	112	90°	ø200 x 130

TECHNICAL DRAWINGS

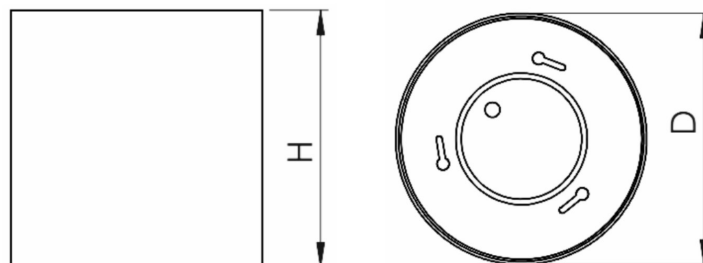

Ø D, mm	H, mm
200	130