

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP40
Impact protection IK:	IK02
Colour temperature:	3000K/4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Tempered Glass
Weight:	2000g




DESCRIPTION

A range of square adjustable LED downlights for accent lighting applications.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Recessed


Body: Die-Cast Aluminium
Colour: White

Available on request;
Dimming: DALI, Switch control dimming.
Emergency: 3hrs
CRI: >80, >90

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
13	1419	4000	>80	107	60°	236 x 146 x 107
18	1988	4000	>80	108	60°	236 x 146 x 107
26	2715	4000	>80	103	60°	236 x 146 x 107
41	3909	4000	>80	95	60°	236 x 146 x 107
48	4393	4000	>80	92	60°	236 x 146 x 107

TECHNICAL DRAWINGS

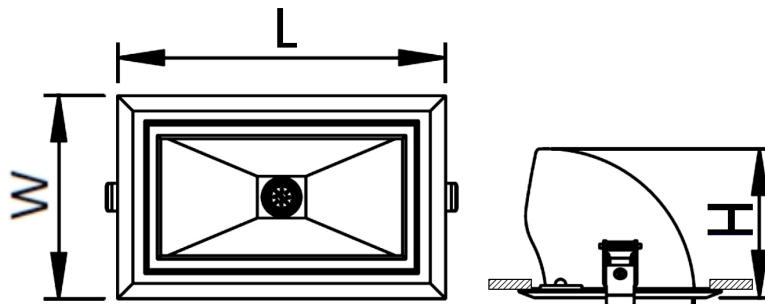

L, mm	W, mm	H, mm	A, mm
236	146	107	223x133