

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP40
Impact protection IK:	IK02
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	PMMA




DESCRIPTION

A recessed LED luminaire with asymmetric light distribution for uniform illumination of walls, shelves and panels.

IES/LDT files available on request.

PHOTOMETRIC



FURTHER INFORMATION

Mounting: Recessed


Body: Steel Sheet
Colour: White

Available on request;
Dimming: DALI, Switch Dimming
Emergency: DALI, 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
15	1510	4000	>80	100	60°	595 x 595 x 165
21	2226	4000	>80	107	60°	595 x 595 x 165
31	3187	4000	>80	104	60°	1195 x 185 x 60
42	4700	4000	>80	113	60°	1195 x 185 x 60

TECHNICAL DRAWINGS

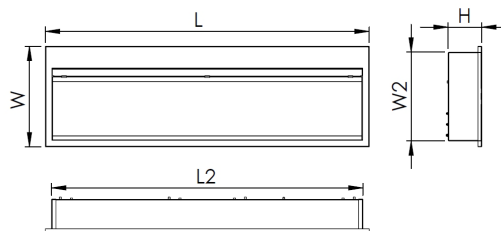

ceiling module	L, mm	L2, mm	W, mm	W2, mm	H, mm
600x600	595	573	185	164	62
1200x600	1195	1173			
625x625	622	600			
1250x625	1246	1224			