

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP40
Impact protection IK:	IK02
Colour temperature:	3000K/4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	>50 000hrs
Diffuser:	Tempered Glass




DESCRIPTION

The Allied Scoop N is an adjustable LED spot light with faceted reflector for the accent lighting

IES/LDT files available on request.

PHOTOMETRIC

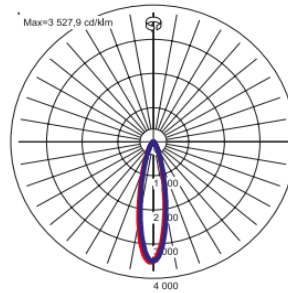

FURTHER INFORMATION

Mounting: Recessed


Body: Aluminium
Colour: White

Available on request;
Dimming, DALI, Mains, 1-10V
Emergency: 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions D Cutout (mm)
13	1370	4000	>80/ >90	103	60°	ø180 x 147
18	1919	4000	>80/ >90	104	60°	ø180 x 147
26	2622	4000	>80/ >90	100	60°	ø180 x 147
41	3774	4000	>80/ >90	92	60°	ø180 x 147
48	4241	4000	>80/ >90	89	60°	ø180 x 147

TECHNICAL DRAWINGS

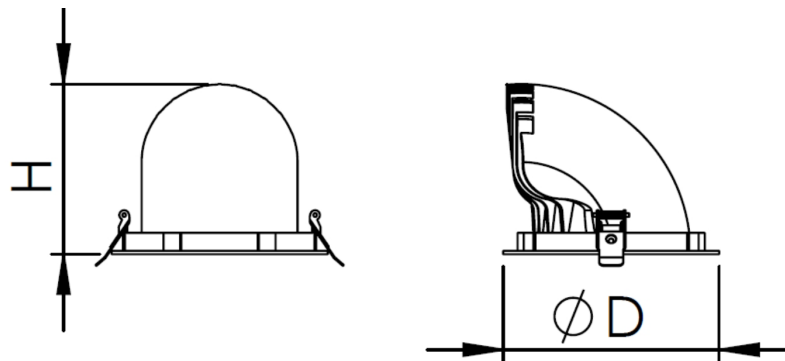

D, mm	H, mm	E, mm
180	147	170