

### SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP66
Impact protection IK:	IK09
Colour temperature:	3000K/4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Tempered Glass
Weight:	2100g/4100g




### DESCRIPTION

The Allied Linear Facade N is a dust and moisture proof LED IP65 fixture for lighting building facades.

IES/LDT files available on request.

### PHOTOMETRIC



### FURTHER INFORMATION

Mounting: Surface


Body: Extruded Aluminium Profile  
Colour: Grey

Available on request;  
Dimming: DALI, 1-10v,

### AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
16	1897	4000	>80	112	30°	705 x 82 x 164
23	2370	4000	>80	116	30°	705 x 82 x 164
30	3162	4000	>80	112	30°	705 x 82 x 164
30	3794	4000	>80	116	30°	1265 x 82 x 164
43	4740	4000	>80	112	30°	1265 x 82 x 164
60	6324	4000	>80	116	30°	1265 x 82 x 164

### TECHNICAL DRAWINGS

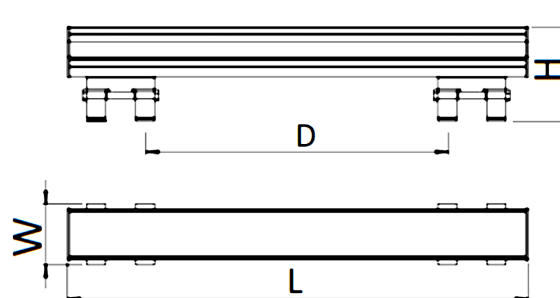

L, mm	W, mm	H, mm	D, mm
705	82	164	310
1265	82	164	880