

### SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP65
Impact protection IK:	IK08/ IK10
Colour temperature:	3000K/ 4000K
Driver:	Helvar/ Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L80B50:	100 000hrs
Diffuser:	Polycarbonate




### DESCRIPTION

An industrial LED Low-bay luminaire with a modern construction and high impact resistance.

A white Sports protection grid accessory can be used to increase impact resistance of the luminaire to IK10.

IES/LDT files available on request.

### PHOTOMETRIC

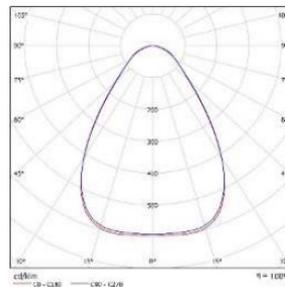

### FURTHER INFORMATION

Mounting: Surface, Suspended


Body: Aluminium  
Colour: White

Available on request;  
Dimming: DALI, Corridor, Switch Dimming  
Emergency: 3hrs, DALI  
Sensor: PIR, Corridor, High Ceiling PIR  
Sports Grid  
Beam Angle: 30x70°, 120°, 60°, 40°

### AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
40.5	7083	4000	>80	175	90°	468 x 340 x 78
46.5	8041	4000	>80	173	90°	468 x 340 x 78
58.7	9921	4000	>80	169	90°	468 x 340 x 78
68.3	11699	4000	>80	171	90°	468 x 340 x 78
80.3	13490	4000	>80	168	90°	468 x 340 x 78
91.1	16082	4000	>80	177	90°	675 x 340 x 78
114.6	19740	4000	>80	172	90°	675 x 340 x 78
138.7	23397	4000	>80	169	90°	675 x 340 x 78
162.8	26842	4000	>80	165	90°	675 x 340 x 78
171.4	29457	4000	>80	172	90°	975 x 340 x 78
207.4	34914	4000	>80	168	90°	975 x 340 x 78
243.5	40054	4000	>80	165	90°	975 x 340 x 78

### TECHNICAL DRAWINGS

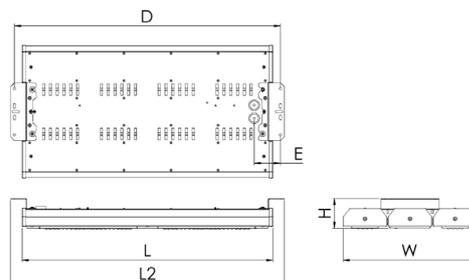

L, mm	W, mm	H, mm	L2, mm	D, mm	E, mm
435	345	78	495	475	62
645			705	685	68
945			1005	985	