

## SPECIFICATION

|                        |   |
|------------------------|---|
| Wattage:               | Various                                 |
| Supply voltage:        | 220-240V 50/60Hz                        |
| Ingress protection IP: | IP66                                    |
| Impact protection IK:  | IK10                                    |
| Colour temperature:    | 3000K/ 4000K                            |
| Driver:                | Tridonic                                |
| Chip:                  | Samsung                                 |
| Power factor:          | >0.95                                   |
| Lifetime @ L70:        | 50 000hrs                               |
| Diffuser:              | Tempered Safety Glass, Impact resistant |




## DESCRIPTION

A waterproof IP66 LED luminaire with aluminium body and tempered glass diffuser. Suits well in aggressive atmospheres with cleaning agents, salts, acids and mineral oils.

IES/LDT files available on request.

## PHOTOMETRIC



## FURTHER INFORMATION

Mounting: Recessed


Body: Extruded Aluminium  
Colour: Light Grey

Available on request;  
Dimming: DALI, Switch-control  
Emergency: 3hrs, DALI, Self-test  
Sensor: Corridor Function

## AVAILABLE OPTIONS

| Rated power(W) | Lumens (lm) | Colour Temperature (K) | CRI | Luminaire Efficacy(lm/W) | Beam Angle   | Dimensions L W H(mm) |
|----------------|-------------|------------------------|-----|--------------------------|--------------|----------------------|
| 24             | 3227        | 4000                   | >80 | 133                      | 30°/60°/100° | 1224 x 105 x 75      |
| 34             | 4390        | 4000                   | >80 | 130                      | 30°/60°/100° | 1224 x 105 x 75      |
| 51             | 5986        | 4000                   | >80 | 118                      | 30°/60°/100° | 1224 x 105 x 75      |
| 30             | 4034        | 4000                   | >80 | 133                      | 30°/60°/100° | 1524 x 105 x 75      |
| 42             | 5487        | 4000                   | >80 | 130                      | 30°/60°/100° | 1524 x 105 x 75      |
| 63             | 7482        | 4000                   | >80 | 118                      | 30°/60°/100° | 1524 x 105 x 75      |

## TECHNICAL DRAWINGS

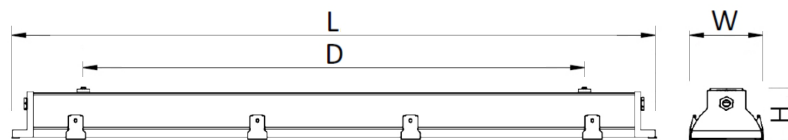

| L, mm | W, mm | H, mm | D, mm |
|-------|-------|-------|-------|
| 670   | 140   | 90    | 580   |
| 1280  |       |       | 1190  |
| 1580  |       |       | 1490  |