

SPECIFICATION

Wattage:	15W
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP20
Impact protection IK:	IK04
Colour temperature:	3200K/ 4000K/ 6500K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70B50:	50 000hrs
Diffuser:	Polycarbonate




DESCRIPTION

The Allied Lucid 20 SQ is a small but powerful square panel fitting, with a cutout of 180x180mm. Available in both silver and white trim bezels.

IES/LDT files available on request.

PHOTOMETRIC

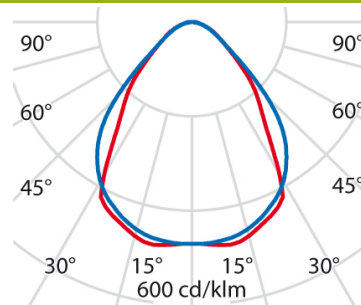

FURTHER INFORMATION

Mounting: Recessed

Body: Aluminium
Colour: White, Silver

Available on request;
Dimming: DALI, 1-10V, Switch Dimming
Emergency: DALI, Self-test, 3hrs

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions Cutout (mm)
15	1200	4000	>80	80	120°	180 x 180

TECHNICAL DRAWINGS

