

SPECIFICATION

Wattage:	79W/106W/132W
Supply voltage:	230V 50Hz
Ingress protection IP:	IP65
Impact protection IK:	IK06
Colour temperature:	3000K/4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.9
Lifetime @ L70:	50 000hrs
Diffuser:	Tempered Glass
Weight:	8000g




DESCRIPTION

Recessed LED luminaire with precise light control for use in petrol stations.

IES/LDT files available on request.

PHOTOMETRIC

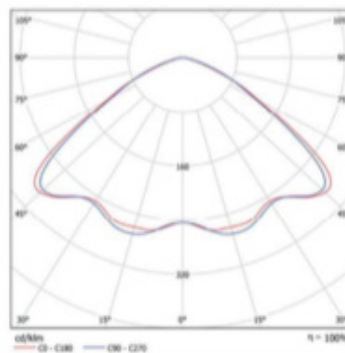

FURTHER INFORMATION

Mounting: Recessed

Body: Steel body with Aluminium heatsink
Colour: White

Available on request;
Dimming: DALI, Dimmable Driver, Switch Control.

Beam Angles;
60°, 90°, 120°, Asymmetric optics

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W (mm)
79	9158	4000	>70	115	See further information	435 x 435 x 95
106	12211	4000	>70	115	See further information	435 x 435 x 95
132	15264	4000	>70	115	See further information	435 x 435 x 95

TECHNICAL DRAWINGS