

SPECIFICATION

Wattage:	Various
Supply voltage:	220-240V 50/60Hz
Ingress protection IP:	IP44
Impact protection IK:	IK05
Colour temperature:	3000K/ 4000K
Driver:	Tridonic
Chip:	Samsung
Power factor:	>0.95
Lifetime @ L70:	50 000hrs
Diffuser:	Micro-prismatic PMMA




DESCRIPTION

A square LED downlight with translucent micro-prismatic diffuser and attractive look.

IES/LDT files available on request.

PHOTOMETRIC

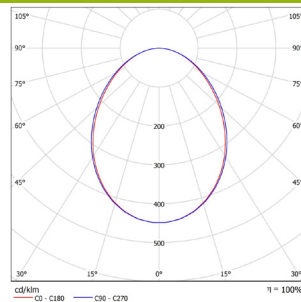

FURTHER INFORMATION

Mounting: Recessed


Body: Steel sheet
Colour: White

Available on request;
Dimming: DALI, Switch dimming
Emergency: 3hrs, DALI
RAL Colour

AVAILABLE OPTIONS

Rated power(W)	Lumens (lm)	Colour Temperature (K)	CRI	Luminaire Efficacy(lm/W)	Beam Angle	Dimensions L W H(mm)
11	1167	4000	>80	109	120°	260 x 260 x 65
15	1631	4000	>80	111	120°	260 x 260 x 65
20	2197	4000	>80	109	120°	260 x 260 x 65
26	2688	4000	>80	103	120°	260 x 260 x 65

TECHNICAL DRAWINGS

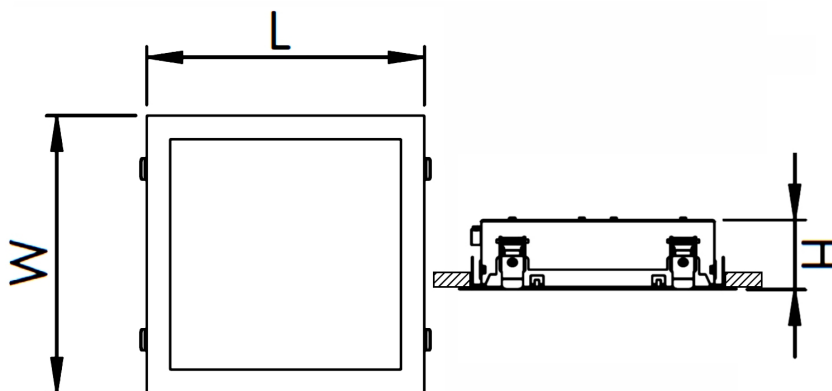

L, mm	W, mm	H, mm	A, mm	B, mm
260	260	65	245	240